# PUMP SELECTION GUIDE

BIOMEK™
WATER ENGINEERING & CHEMICAL

## PERIPHERAL PUMPS

**1 TAPS RUNNING AT FULL FLOW**

**QB60 0.37KW**
MAX FLOW- 2100 L/HR

**2 TAPS RUNNING AT FULL FLOW**

**QB80 0.75KW**
MAX FLOW- 2800 L/HR

## CENTRTIFUGAL PUMPS

**3 TAPS RUNNING AT FULL FLOW**

**CPM146 0.55 KW**
MAX FLOW- 4800 L/HR

**4 TAPS RUNNING AT FULL FLOW**

**CPM158 0.75 KW**
MAX FLOW- 5700 L/HR

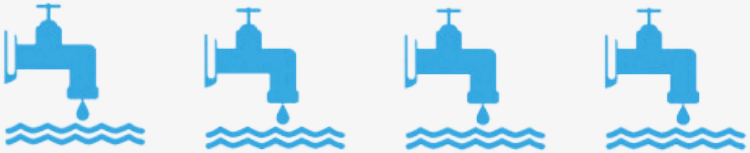

**5 TAPS RUNNING AT FULL FLOW**

**CPM170 1.10 KW**
MAX FLOW- 6600 L/HR

**6 TAPS RUNNING AT FULL FLOW**

**CPM190 1.50 KW**
MAX FLOW- 7200 L/HR

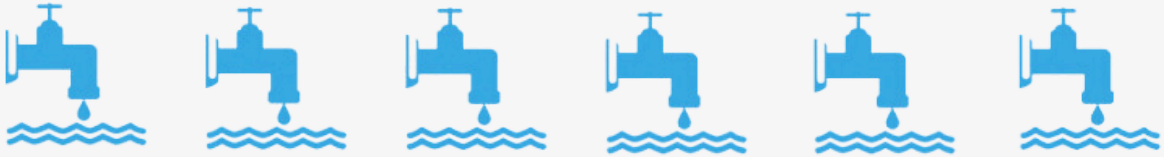

NB: PUMP SELECTION GUIDE IS ONLY A GUIDE AND MAY VARY DEPENDING UPON THE ACTUAL PUMPING PARAMETERS AND SITE SETUP